

USER'S MANUAL

DAI - DOS 1541
=====

OPERATING SYSTEM

FOR

**DISK DRIVE VC1541
DIGITAL RECORDER
PARALLEL PRINTER
HIGH SPEED LOADER**

A co-production of:

**Software: Jan Boerrigter
Hein Kop**

**Hardware: Henk Rison
Peter Wiegers**

(C) - January, 1985

1. GENERAL:

This manual describes the operation of the Commodore VC1541 floppy disk drive, connected to the DAI personal computer.

Up to 4 VC1541 disk drives are supported by the operating system, together with 4 digital MDCR recorders and 2 audio-cassette recorders.

The operating system is contained in one 2764 EPROM, using the address areas F000-F7FF and F900-F9FF. The address area FA00-FAFF is used for an additional 6116 RAM.

The software is fully compatible with the existing DAI BASIC versions V1.0 and V1.1. No addresses in the RAM area 0000-BFFF are used for the disk operating system, except the ones already used by the MDCR software.

For addressing purposes, the DCE-RWC concept is used.

The Memocom MDCR software is also compatible, as long as it is used from BASIC, or under UTILITY is addressed only via the entrypoints as given in the MDCR manual.

Not directly compatible might be the following programs:

- Object code programs using the area #0297-#02EB.
See under 'useful hints' how to adapt these programs.
- Programs with direct access to MDCR subroutines.
- Programs which change the 8255 mode.
- Programs using a modified RST6 vector.
- Programs which are protected by many tricks.

Also software for driving a parallel printer and a high speed data loader is implemented, together with several additional commands.

2. MEMORY MAP:

The address range F000-F7FF is used by several switched ROM banks:

Bank 0: General routines for the floppy disk drive (FDD), the digital cassette recorder (DCR), the parallel printer, the extra commands and all housekeeping routines.

All UTILITY calls to FDD and DCR routines must be made via this bank. Each routine, executed in another bank, returns automatically to bank 0.

Bank 1: The floppy disk operating system.

Bank 2: The operating systems for the digital recorder and the High Speed Data Loader.

Bank 3: Free for own use, except F100-F1FF.

The addresses F900-F9FF are used for several general purpose routines. This address range is located in bank 3 of the EPROM.

3. CONNECTION:

For the installation of the EPROM-card and the connection of the interface, refer to the additional installation scheme.

For computers of Rev.7 and higher, the jumper on pins 21 and 22 of the X-bus has to be removed.

A parallel printer can be connected to the 26 pins connector on the interface. The high speed data loader must be connected directly to a connector on the flat cable.


4. POWER-ON:

The equipment should be switched-on in the following sequence:

Peripherals (TV/monitor, etc) - Disk drive - Computer.

In this order, the computer delivers a 'reset' to the disk drive for correct initialisation.

When the DAI is switched on, or when the "reset"-button is pressed, the following happens:

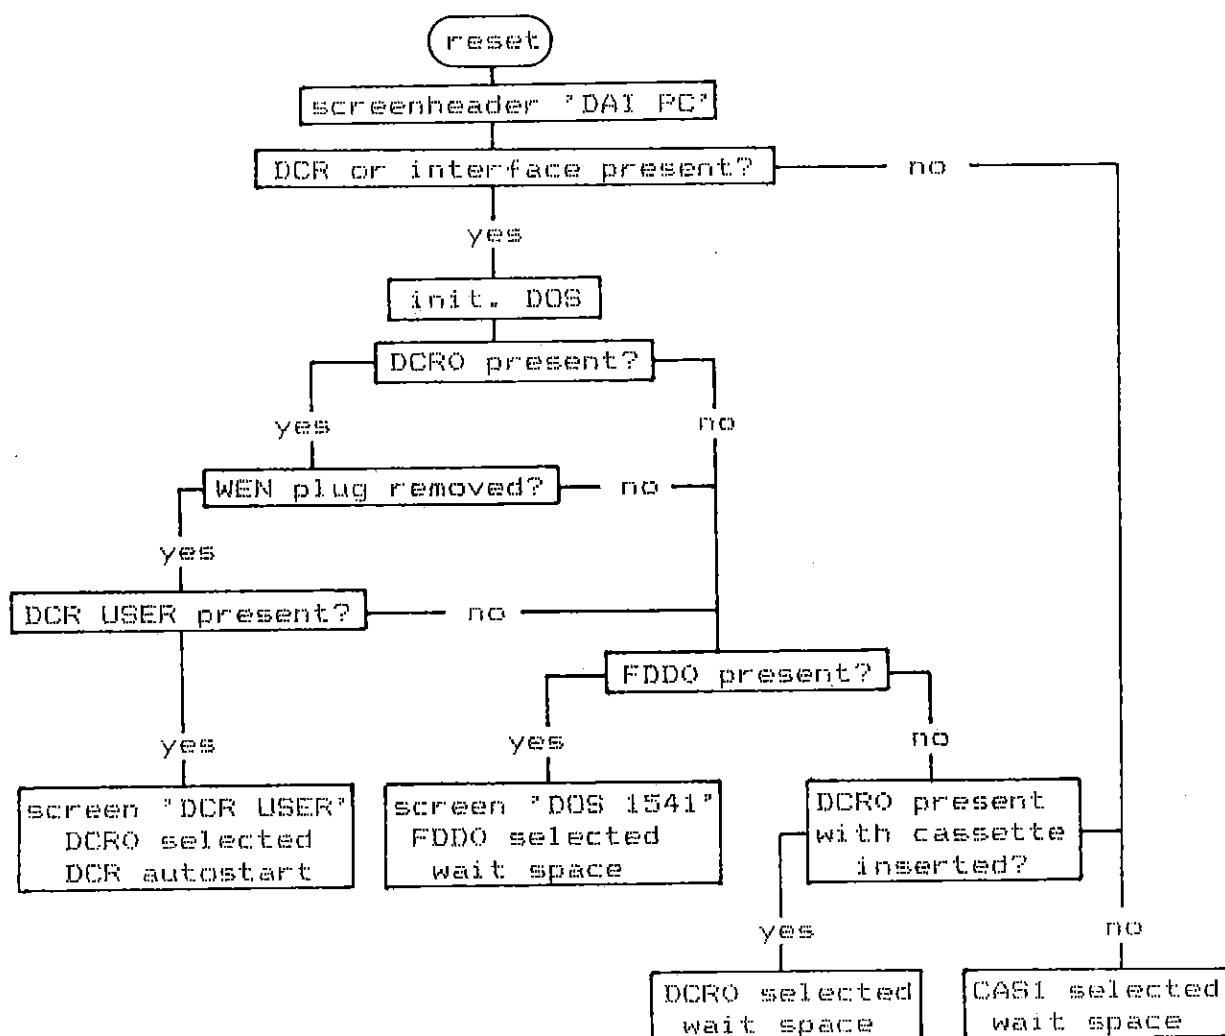

When the DOS is initialised, the vector address of the RST6 interrupt is changed.

If no interface or no DCR is connected, the DOS can be initialised with: CALLM #F3F3. Now CAS1 is selected as the external memory device.

5. COMMANDS:

5.1. DAI commands:

All DAI commands for writing and reading like LOAD, SAVE, LOADA, SAVEA and UTILITY W(rite) and R(ead) are valid for DCR and FDD. Only the command 'CHECK' does not work on the FDD (the result will be a SYNTAX ERROR).

See the DAI manual for the correct formatting.

For saving and loading on the disk drive, the following remarks have to be taken into account:

During "read"-operations on the disk drive, the cursor will remain flashing. This does not mean that loading does not occur, as it does for loading from tape.

All files must be saved to disk with a filename. A simple "LOAD" or "SAVE" will result in a SYNTAX ERROR.

When using filenames, max. 16 characters are allowed. Longer names will be truncated.

The use of the characters ":" and "," in filenames is not allowed !! The characters "#" and "'\$" are not allowed as the first characters of a filename.

The characters "*" and "?" can be used in filenames only as so-called "wild cards". See the explanation in the VC1541 manual.

Existing files can be overwritten by using: "%:FILENAME" (to the VC1541 "%:FILENAME" is sent).

If no file with this name exists on the diskette, the file is stored as a new file.

Be careful when entering the filename under UTILITY. If a typing error is made and the <CHARDEL> key is used, the backspace will remain - invisible - in the name. This will cause problems reading the file again. It is better to save with an incorrect name, and correct it afterwards with the "RENAME" command.

The UTILITY commands Z2 and Z3 reset the RST6 vector address to the default value. To restore this vector, a Z2- or Z3-command must be followed by: >GF3F3, or changed by the V6-command: >V6 D578-F93E.

5.2. DCR commands:

They are equivalent to the commands described in the MDCR manual, except that only the short versions are supported:

- DCR X : Selects DCR 0-3 as back-up memory. If no number is given, DCR 0 is selected.
- REW : Rewinds to the beginning of the tape.
- REW X : Rewinds X files.
- SKIP : Skips to after the last file.
- SKIP X : Skips X files.
- DEL : Erases to the end of the tape.
- LAST : Marks the previous file as the last one.
- VER : Checks the previous file.
- LOOK : Displays the name of the next file.

For REW and SKIP, X can be max. 9 files.

If a DCR is selected as back-up memory, all FDD commands are disabled (DEVICE MISMATCH error).

For saving, loading and verifying on the DCR, an "on-error" possibility exists.

For further explanation, see the MDCR manual.

The DCE-bus addresses for the DCR's are #0x, in which 'x' is 3, 7, B or F (DCR 0-3).

5.3. FDD commands:

For a complete explanation of these commands, refer to the VC1541 User manual. Only the formats are given here.

- FDD X : Selects disk drive 0-3 as back-up memory. The disk drives must be set hardwarewise to the addresses 0B-0B. If no number is given, disk drive 0 is selected.

If more than one disk drive has to be used, they must be daisy-chained to each other as described in the VC1541 manual.

DCR commands are disabled and will result in a DEVICE MISMATCH error.

The DCE-bus address for the FDD interface is #20.

- FORMAT : FORMAT"DISKETTENAME, ID". Formats a new diskette. Each diskette should have a name of max. 16 characters and a unique identity code of 2 characters.

- SCRATCH: SCRATCH"FILENAME1, FILENAME2,".

Removes indicated files from the diskette.

SCRATCH,ABC"* wist alle files die met ABC beginnen.

SCRATCH "" wist alles behalve de disknaam.*

- RENAME : RENAME"NEWNAME=OLDNAME".
 Changes the name of a file on the diskette.
- COPY : COPY"NEWFILE=OLDFILE1,OLDFILE2,...".
 Merges several files together in a new file.
 This command is not very useful for the DAI
 file types, except for copying one file into
 another with a different name.

Note: For SCRATCH, RENAME and COPY, the max. string length is 40 characters.

- INIT : INITializes the disk drive to the power-up state.
- VALID : The VALIDate command re-organizes the diskette to get the max. free space available.
- DIR : Reads the DIRectory from the diskette into the screen memory. No programs in memory are destroyed. Listed are:
 - Number of blocks (each 256 bytes).
 - Filename.
 - Fieltype: PRG - BASIC files (DAI type 0)
 - USR - UTILITY files (DAI type 1)
 - SEQ - All others (DAI <> 0,1)
 - REL - Relative files.

By means of the cursor keys, a BASIC or a UTILITY program can be loaded directly from the directory:

- cursor up/down : select program
- cursor right+shift : load indicated program
- cursor left : exit from directory
- space : next page (if present)

PRG-files will run automatically when loaded from the directory.
For USR-files, the UTILITY mode is entered ('Z3' is not performed automatically).

- EVER : EVER"FILENAME".
 Verifies the recording of the indicated file by means of a checksum test. The filename must be identical to the directory entry.
 This command is a replacement for the DAI "CHECK" command.
 REL-files can not be verified, due to the different format.

Because all files are opened and closed automatically, no additional "OPEN" and "CLOSE" commands are required.

If due to an error a file remains open (the red LED on the on the disk drive remains on), it can always be closed by CALLM #F2ED.

The VC1541 options for relative files and for direct access commands are not supported by the DAI-DOS 1541. They can be used only in special designed user programs.

5.4. Other commands:

- BOOT : BOOT"OBJECTname,BASICname".

Loads an object code program, followed by a BASIC program. The heap pointer is updated accordingly. The program starts running automatically. This command is a replacement for the DBL bootstrap loader.

The command is useable for: FDD, DCR and CAS.
 - UBL : UBL"FILENAME".

As "BOOT", but for files consisting of a BASIC and a object code part, stored with the same filename with the following suffixes:

 - FILENAME/O object code part
 - FILENAME/B BASIC part
 - CAS X : Selects an audio-cassette recorder as back-up memory. If no number is given, recorder 1 is selected.
 - CAS 0 : No recorder selected.
 - CAS 1/2 : Recorder 1 or 2 selected.
 - CAS 3 : Both recorders selected.

DCR and FDD commands will cause a DEVICE MISMATCH error.
 - HSL X : Reads data from EPROM 0-3 in the High Speed data Loader. If the data loader is not connected, or the selected EPROM is not present a NOT AVAILABLE message is printed.
 - USR : Calls a USER defined object code subroutine via the I/O table address #02DA.
 As default, a RET-command is written on this address. It can be changed into: "C3-lo-hi", in which "hi" and "lo" are the high and the low bytes of the start address of the required subroutine.
 - Note: Each FDDx/DCRx/CASx select command will return this pointer to the default state !
 - LN0N : Switches on the AUTO-LINENUMBER function. If in the direct mode the first input is a space then automatically a linenumber is generated.
 - The first linenumber is 10, the step size is 10 too.
 - Each time a linenumber is generated, it is incremented with the step size.
 - The default value of 10 will be restored by CALLM #F3F3.

The values of linenumber and step size can be changed by:

- A%=<linenr> : CALLM #F55F,A%
- A%=<stepsize>: CALLM #F56F,A%
- LNOFF : Switches off the AUTO-LINENUMBER function.
- <TAB> : The <TAB>-key can be used in direct mode to clear the screen.
- /C : The default cursor - flashing underline - is selected.
- /D : Output to the screen only. Short command for POKE #131,1. The baudrate for the RS232 input is set to the value in BDIN (default is 9600 baud - user changeable). The baudrate pointer for the RS232 output (BDDOUT) remains unchanged.

Note: In BASIC V1.1, a "break" sets the output switch always back to screen + RS232.

- /E : Input from the edit buffer. Short command for POKE #135,2.
- /F : Sets Implicit Floating Point. Short command for IMP FPT.
- /H : "HELP". Displays several important I/O directions:
 - EXT: selected back-up memory:

CAS	- (EXTDEV=1)	FDD	- (EXTDEV=3)
DCR	- (EXTDEV=2)	HSL	- (EXTDEV=4)
 - IN : input source:

KEYB	- keyboard	(INSW=0/2 - even)
DINC	- user defined	(INSW=1/3 - odd)
		default RS232
 - OUT: output direction:

SCRN	- screen only	(OTSW=1)
RS232	- screen + RS232	(OTSW=0)
EDIT	- edit buffer	(OTSW=2)
DOUTC	- user defined or parallel printer	(OTSW>=3)
 - IMP: number type:

INT	- integer
FPT	- floating point

After a DEVICE MISMATCH error, the HELP command will indicate the device incorrectly addressed.

- /I : Sets Implicit Integer. Short command for IMP INT.
- /M : Short command for MODE 0.
- /P : Output to parallel printer. Short command for POKE #131,#80.

Every time an output is required, the character is sent to the screen and to the parallel printer.

If no printer is connected, or the printer is not switched on, the output will be to the screen only.

For the parallel printer, a "carriage return" character is not followed by a "line feed". Adapt the dip-switch setting in the printer accordingly.

Connections of the parallel printer:

DCE	signal	26 pins conn.	Centronics
PC1	<u>Strobe</u>	1	1
PA0)	3	2
PA1)	5	3
PA2)	7	4
PA3) <u>Database</u>	9	5
PA4)	11	6
PA5)	13	7
PA6)	15	8
PA7)	17	9
PC4	<u>Busy</u>	21	11
PC5	<u>Error</u>	25	32

All even pins on the 26 pins connector are connected to ground.

The DCE-bus address for the parallel printer interface is #40.

Because the parallel printer interface needs a different setting of the 8255 mode, and due to the fact that not two ROM-banks can be addressed simultaneously, it is not possible to use the parallel printer in combination with DCR, FDD and HSL commands.

Therefore, if the parallel printer was selected, the output switch is set to the "screen only" mode if any DCR - FDD - HSL command is given!

Also direct commands are not printed due to the way the DAI handles the DOUTC routine.

- /S : Output to screen and RS232 output. Short command for POKE #131,0. Each character sent to the screen is also sent to the RS232 outlet.

The baudrate for the RS232 output is set to the contents of the pointer BDOUT (default 9600 baud, but user changeable).

The baudrate pointer for the RS232 input (BDIN) remains unchanged.

After a reset, the DAI always defaults to this situation.

- /T : Sets default text colours. The COLOR/T registers are loaded with 8-0-0-0.
- /O : Defaults various DAI pointers. It is a combination of: select mode 0, clear screen, set default text colours, set default cursor and select IMP INT.
- : READ LINENUMBER: It is possible to read DATA statements on a given program line via:

```
10 A%=<linenumber>; CALLM #F33A,A%
20 READ ....
```

- : The command table can be extended in the following way:
Make your own command table, with the format:

- <length>	e.g.: 4
- <command string>	TEST
- address of routine	00-03 (#300)
- 3x NOP	end of table

Store the startaddress of the command table in EXTTAB (#FA19/1A - lo/hi byte).
Note: This address is cleared by reset or by CALLM #F3F3 !!

6. ERROR MESSAGES:

For both the DCR and the FDD, the standard DAI loading error messages are used.

The FDD reports several error messages itself. They can be found in the VC1541 manual.

In addition, the following DOS error messages may occur:

- DCR DOOR OPEN : The cassette door of the DCR is opened during writing.
- END OF TAPE : The end of the DCR tape is reached during writing.
- FILE TYPE MISMATCH: The filename sent to the disk drive is correct, but the file is not of the expected type.
- FDD NOT AVAILABLE : The selected disk drive is not connected, or not switched on.
- OUT OF TIME ERROR : The drive doesnot respond to handshake signals.
- HSL OR EPROM NOT AVAILABLE : An attempt is made to read from a non existant EPROM in the data loader, or the data loader is not connected.
- DEVICE MISMATCH : A command is given to a memory device which is not selected.

After one of these DOS errors, the output switch #131 is set to 1 (output to screen only).

After a DAI error, this switch is always set to 0 (output to screen and RS232).

For the DCR LOAD(A), SAVE(A) and VERIFY routines and the FDD FVERify routine, an 'on-error goto' possibility exists:

CALLM #FO03,ERROR%	Set pointer to the variable where to store the errorcode.
--------------------	---

The variable ERROR must be an integer variable.
In the program, a check must be incorporated by means of: ON ERROR% GOTO xx, yy, zz.

CALLM #FO06	Disables the on error feature
-------------	-------------------------------

For additional explanation, refer to the MDCR manual.

7. USE OF DOS COMMANDS FROM BASIC:

All DOS commands are valid in direct mode only. To enable the use of these commands from BASIC, a special construction has to be used. It is already described in extention in the MDCR manual.

The commands must be placed in a "REM"-statement, which follows a CALLM #FO00 statement.

E.g. if one of these commands must be used from a BASIC program, it is programmed as follows:

```
10 CALLM #FO00: REM FDDO:DIR
20 CALLM #FO00: REM SKIP3:LOOK
30 CALLM #FO00: REM CAS2
```

Also the following format is possible:

```
40 A$="FILENAME1": CALLM #FO00: REM SCRATCH A$
50 B$="FILENAME3=FILENAME2": CALLM #FO00: REM RENAME B$
```

B. USEFUL HINTS:

If for whatever reason access to the additional commands is no longer possible, then use: CALLM #F91A.

This will force the bankswitch back to the default value and enables access to the input routines.

By CALLM #F3F3, the DOS is initialised again to the default state.

If due to whatever reason the red LED on the disk drive remains flashing, it indicates some error which is not read automatically. The V01541 error channel can be read by means of CALLM #F2E8.

More than one DOS command can be placed in one program line. However, commands which move the cursor to the next line (like LOOK, VER, DIR) cannot be followed by another command. DOS commands cannot follow a DAI command on the same line.

Object code programs covering the address range #0297-#02EB can be transferred from audio-cassette to FDD or DCR in one of the following ways:

Example: Program is on #29B-#KKK.

*CASx: UT
 >Z3
 >R1000
 >B
 *FDDx: UT (or DCRx)
 >M2C5 2EB 12C5
 >M129B 1KK 29B
 >W29B KKK <filename>

*CASx: UT
 >Z3
 >S296 02-00
 >R
 >GF3F3
 >B
 *FDDx: UT (or DCRx)
 >W29B KKK <filename>

The method described in the right column replaces the one described in the MDCR manual.

Some programs need a slight modification to enable operation of the DAI-DOS 1541. The following corrections are known:

FWP	#0605	11-B6-F7	into	11-BE-F1
	#0637	CD-A7-F0	into	CD-D7-F0
SPL	#B2B3	CD-CD-F0	into	CD-FD-F0
DNA/DCR	#10E7	B6-F7	into	BE-F1

9. UTILITY ENTRY-POINTS:

The following entry-points can be used from object code programs:

- FDD entrypoints:

- F2A9 - Select FDD0
- F2B3 - Format (*)
- F2B8 - Scratch (*)
- F2C0 - Rename (*)
- F2C5 - Copy (*)
- F2CA - Initialise
- F2CF - Validate
- F2D4 - Read directory
- F2DE - Verify (*)
- F2E8 - Read error channel
- F2ED - Close file

- Other entrypoints:

- F000 - Execute REM statement
- F003 - Initialise on error
- F006 - Disable on error
- F00F - Select CAS1
- F18E - Start command table
- F29F - Select dataloader
- F45E - Boot (*)

- DCR entrypoints:

- F009 - Open DCR
- F00C - Select DCRO
- F012 - Rewind
- F015 - Skip
- F018 - Verify
- F01B - Last
- F01E - Look

Entry-points, marked with (*) are not so very useful, because always a string must follow the command.

- Used RAM pointers:

DAI RAM:

011F	-	DCRSL	- Selected DCR.
0120/21	-	ERRCO	- Pointer error code storage address. If 00, then normal error reporting. If <> 00, the error code is stored at ((ERRCO)).
01E0	-	FILES	- Number after DCR/FDD/HSL/CAS command.
0297/98	-	TABPTR	- Pointer to command table.
0299/9A	-	RSP	- Rescued stack pointer.

DOS RAM:

FA00	-	USRFLG	- Flag for DCR USER bootstrap: Set = 01, cleared = 00.
FA01	-	NEWBNK	- F-bank to be selected.
FA02	-	MEMBNK	- Selected F-bank.
FA03/04	-	MEMHL	- Temp. storage HL.
FA05/06	-	MEMPSW	- Temp. storage PSW.
FA07/08	-	USERST	- Start address DCR USER routine.
FA09	-	EXTNR	- Serial number ext. memory device.
FA0A	-	EXTMEM	- Flag for ext. memory device: 01 = CAS 03 = FDD 02 = DCR 04 = HSL
FA0B/0C	-	UTST	- Start address Utility program when loaded from directory.
FA0D/0E	-	MEMCUR	- Temp. storage cursor information.
FA0F	-	RSTFLG	- Flag for reset routine: Set = 00, cleared <> 00.
FA10	-	FDDSL	- Selected FDD (primary addresses 08-0B).
FA11	-	BUSBUF	- Character buffer for FDD operation.
FA12	-	SEKAD	- Secondary address FDD. For DAI files always channel 2 is used. Channel 15 is the command/error channel.
FA13	-	FILTYP	- File type: 50 if PRG, 53 if SEQ, 55 if USR.
FA14	-	RWFLG	- Read/write flag: 52 if READ, 57 if WRITE.
FA15	-	STAFLG	- Status flag FDD: b7=1: FDD not present. b6=1: EOF (end of file). b1=1: Time out (read). b0=1: Time out (write).
FA16	-	BUSFLG	- Flag for FDD bus operation: Set: b7=1.
FA17	-	ERRFLG	- Error flag FDD: Set is <> 0.
FA18	-	EOIFLG	- End-of-identify flag FDD: Set: b7=1.
FA19	-		- Must always be 0 !
FA1A/1B	-	EXTTAB	- Pointer to external command table. Default value: 0000.
FA1C	-	SCRNBD	- Baudrate for screen output. Default value: C0 (9600 baud).
FA1D	-	SERBD	- Baudrate for serial printer. Default value: C0 (9600 baud).
FA1E-4F	-	FILEBUF	- I/O buffer for FDD operations.
FA50-6F	-	UTNAM	- Name UTILITY program during "boot".
FA70-8F	-	BASNAM	- Name BASIC program during "boot".

FA90 -- LNAUTO -- Flag auto-linenumber:
 Active = FF, disabled = 00.
FA91/92 -- LNNUM -- Current linenumber for auto-function:
 Default start value: 0A.
FA93/94 -- LNSTEP -- Step size for auto-linenumber:
 Default value: 0A.
FA95-FF -- Free for own use.
FFFF -- BNKSL -- Bankswitch F-bank 0/1/2/3.

10. WARRANTY:

The DAI-DOS 1541 is sold subject to the understanding that if any defects in manufacture or material shall appear in it within 3 months of date of sale, it will be arranged for such defects to be rectified without charge. Tempering with the DAI-DOS 1541 or unauthorized repair will render the warranty nil and void. No responsibility is taken by the manufacturers for damage caused by the DAI-DOS 1541 or by its use.

11. LITERATURE:

1. User's manual VC1541 floppy disk drive - Commodore.
2. Das grosse Floppy Buch - English/Szczepanowski - Data Becker/Duesseldorf.
This book is a "must" for every VC1541 user !!
3. 64 Intern - Angerhausen/Brueckmann/English/Gerits - Data Becker/Duesseldorf.
4. Floppy Disk fuer den MC68 - Schoen - articles in "MC", April + May, 1984.
5. Manual PET/CBM - Commodore.
6. Manual Memocom MDCR-D - Wegman - Memocom/Rotterdam.
7. DAI firmware manual - Boerrigter - Micro Service/Sweikhuizen.
8. DAI pC user's manual - INDATA/Brussels.
9. MCS-80/85 family user's manual - INTEL.

Rev. 1.0 - (C) - Jan Boerrigter, January 1985.

All rights reserved. No part of this publication nor of the software contained in EPROM may be reproduced, stored in any retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of the authors.

INSTALLATION OF THE DAI-DOS 1541 SYSTEM

Preparation:

Disconnect all cables from the DAI. Remove the four black plugs with a flat screwdriver and remove the top cover carefully. For Rev.7 and higher: Remove the ground wire from cover to main board.

Locate the 50-pins X-bus connector on the right, just below the transformer cage. MDCR owners find already an EPROM card mounted on this connector. This card must be removed.

If the main board is fixed to the bottom part of the case, remove all bolts. Lift the main board from the bottom part of the case and turn it over on a clean flat surface or a piece of plastic foam with the bottom side up and the keyboard facing you.

Installation of a reset wire to the X-bus:

Locate the soldering points of the X-bus connector. The bottom row of pins has from right to left 11 soldering points connected together. Above this connector (towards the transformer), are two additional rows of each 20 pins. These are the connections of the 8255 chip.

Starting at the right side of the X-bus connector, locate the 9th pin on the top row. This soldering point (pin 18) is free. Mark this point (not with pencil). The reset wire must be connected to this soldering point.

The reset signal is taken from pin 35 of the 8255 chip. This pin can be found as follows:

Locate the right side of the X-bus connector. Locate the two rows of 20 pins above this connector. Take the top row, and locate the 6th pin from the right. This is the reset pin.

Solder an insulated wire between pin 35 of the 8255 and pin 18 of the X-bus. Be careful not to make a short-circuit with any other pin. Use a soldering iron with a small tip and of low power (no soldering gun !!!).

Installation EPROM card:

Turn the main board over again and place it in the bottom part of the case. Eventually, mount the bolts again.

Place the EPROM card containing the DOS 1541 on the X-bus connector, with the IC's towards the keyboard.

Re-assembling:

Replace the top cover (Rev.7: don't forget the wire between cover and ground !) and insert the 4 black plugs. Connect the power cable and the TV or the monitor.

Installation interface:

Connect the interface with a flat cable to the DCE-bus. Take care of the correct mounting !!! Connect the floppy disk drive to the interface with its own cable and switch on the power of the disk drive.

Test:

Switch on the DAI. The screen will display "DAI PERSONAL COMPUTER", and about a second later "DAI COMPUTER DOS 1541". Press the reset switch and check if this is repeated. By pressing any key, the BASIC monitor is entered.


Insert the diskette which is delivered together with the disk drive. Type "DIR". Now on the screen the contents of this diskette will be displayed.

(These programs cannot be runned on the DAI, because they are stored in CBM64 format).

Now insert a new diskette, and start FORMATTing it as described in the manual. Now writing and reading can be performed.

Note:

The X-bus card and the interface are tested before shipping. No responsibility is taken for any faulty connection and/or installation made by the user, nor for any damage as a result of it.

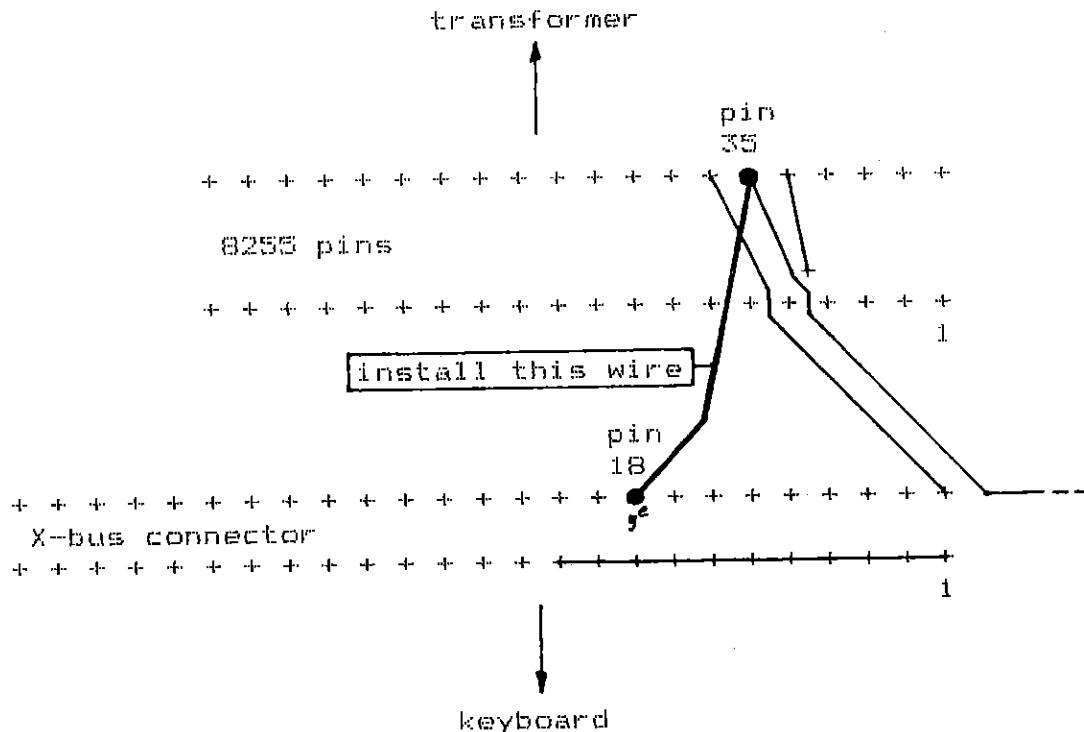BOTTOM (SOLDERING) SIDE OF THE MAIN BOARD PRINT:

Tabel 1.2: Structuur van de directory-track (track 18)

Track 18, sector 0	Byte 0 Opmerkingen Track van volgende directory-blok (altijd track 18!).
	1 Waarde 65 geeft aan dat de diskette geformateerd is op de 1541.
	2 Ongebruikt, normaal een 0.
	3 Eerste byte van BAM, bevat aantal vrije sectoren op track 1.
	4 Track 1, sector 0-7.
	5 Track 1, sector 8-15.
	6 Track 1, sector 16-23.
	7 Aantal vrije sectoren op track 2.
	8 Track 2, sector 0-7.
	9 Track 2, sector 8-15.
	10 Track 2, sector 16-23.
	11 ...
	12 Track 35, sector 16-23 (laatste byte van de BAM).
	13 Naam van diskette aangevuld met shift-spaties (CHR\$(160)).
	14 Eerste byte van identificatienummer (ID).
	15 Tweede byte van ID.
	16 Ongebruikt, normaal waarde 160.
	17 '2', geeft DOS-versie aan.
	18 'A', geeft DOS-versie aan.
	19 Ongebruikt, normaal waarde 160.
	20 Ongebruikt, waarde onbepaald.
Track 18, sector 1	Byte 0 Opmerkingen Track van volgende directory-sector (gewoonlijk 18, 0 indien laatste).
	1 Volgende directory-sector (255 betekent einde directory).
	2 Eerste file (voor details zie hoofdstuk 11).
	32 Ongebruikt.
	33 Ongebruikt.
	34 Tweede file.
	64 Ongebruikt.
	65 Ongebruikt.
	... enzovoort.
	226-255 Achtste file.

gebruikte filetypen zijn de programma-file, die wordt gevormd wanneer een programma wordt opgeslagen (met SAVE), en de sequentiële file, die wordt gevormd wanneer een file wordt geOPEND om gegevens opte slaan. Beide types worden op precies dezelfde wijze op de diskette opgeslagen. We zullen daarom het opslaan van een gewoon programma als voorbeeld nemen.

Gang van zaken tijdens het opslaan van een programma-file

1. Het commando SAVE wordt ingetoetst door de gebruiker en de diskdrive wordt opdracht om een bepaalde programma-file te openen.
2. De diskdrive controleert in de directory of er nog geen file bestaat met dezelfde naam.
3. Als de naam nog niet voorkomt, wordt hij in de directory opgenomen met als begintrack en sector 0,255 – een niet bestaande track.
4. Gebruikmakend van de BAM, die altijd in het geheugen van de diskdrive wordt bewaard, zoekt de drive naar een track met een vrije sector (sector 1), die zo dicht mogelijk bij track 18 (de directory) ligt en kenmerkt die sector in de BAM als bezet.
5. Als sector 1 is gevonden, onthoudt de drive zijn positie en accepteert dan 254 bytes van het programma uit de 64 en plaatst deze in een buffer in het geheugen van de diskdrive.
6. Opnieuw wordt een lege sector gezocht (sector 2).
7. Het adres van sector 2 (gevonden in fase 6) wordt nu opgeslagen in de eerste twee bytes van de buffer waarin ook al de 254 bytes van het programma staan.
8. De volledige inhoud van de buffer wordt nu geschreven in sector 1 (gevonden in fase 4).
9. Sector 2 wordt nu beschouwd als sector 1 en de procedure wordt herhaald vanaf fase 5 totdat de 64 de diskdrive laat weten dat de file wordt afgesloten, nadat het volledige programma is doorgegeven.
10. In de laatste buffer met gegevens wordt als adres van de volgende sector 0,255 gezet om aan te geven dat de file is afgesloten.
11. De verwijzing in de directory wordt aangepast, zodat de eerste sector van de file wordt vermeld, alsmede het aantal bytes die de file in beslag neemt.

Als na verloop van tijd een aantal programma's op de diskette is opgeslagen, vervolgens weer gedeeltelijk gewist en overschreven door andere programma's, zal de indeling van de diskette vrij chaotisch zijn geworden. Programma's zullen van de ene track naar de andere springen, zon-

11 De directory

Tabel 11.1: Opbouw van een vermelding in de directory

BYTE	OPMERKING
0	filetype
0	=ongebruikt of gewist (DEL)
1	=niet gesloten SEQuentiële file
2	=niet gesloten PRogramma-file
3	=niet gesloten USer file
4	=niet gesloten RELatieve file
128	=gesloten gewiste (DEL) file
129	=gesloten SEQuentiële file
130	=gesloten PRogramma-file
131	=gesloten USer file
132	=gesloten RELatieve file
1	Track van eerste blok in file
2	Sector van eerste blok in file
3-18	Filenam tussen shift-spaties (CHR\$(160))
19	Relatieve files – track van eerste side sector
20	Andere filetypes – ongebruikt
21	Relatieve files – sector van eerste side sector
22-25	Andere filetypes – ongebruikt
26-27	Ongebruikt
28-29	Alleen gebruikt wanneer een file wordt weggeschreven of geOPENd met '@0:' Aantal blokken in deze file

In het eerste hoofdstuk van dit boek hebben we een korte beschrijving gegeven van de directory (of inhoudsopgave) van een diskette. Sindsdien hebben we de functie van de directory, namelijk het tonen van de inhoud van een diskette aan de gebruiker en het wijzen van de plaats van de files op de diskette aan het besturingssysteem, min of meer als vanzelfsprekend beschouwd. In dit hoofdstuk zullen we iets dieper ingaan op de indeling van de directory en de manier waarop we hem rechtstreeks kunnen lezen.

11.1 De indeling van de directory

In tabel 1.2 (pagina 14) wordt de opbouw getoond van de tracks die de directory vormen. Bij het bekijken van deze tabel zien we dat de directory staat op track 18, te beginnen bij sector 0. Deze eerste sector bevat de Block Allocation Map (BAM), maar de rest van track 18 is gereserveerd voor de bijzonderheden over de files op de diskette. Het tweede deel van tabel 1.2 laat zien hoe elk van deze sectoren de acht filevermeldingen kan bevatten. Aangezien er 19 sectoren op track 18 staan, kunnen we makkelijk uitrekenen dat een diskette – hoeveel lege ruimte er ook op staat – maximaal 144 files kan bevatten (18 maal 8).

Binnen de algemene indeling van de directory wordt de opbouw van een enkele file getoond in tabel 11.1.

Deze tabel zal u bekend voorkomen na het lezen van de voorgaande hoofdstukken. Van het filetype, byte 0 van de vermelding, hebben we al gebruik gemaakt in ons UNSCRATCH-programma in hoofdstuk 10. Daarmee wordt van files die als gewist in de directory staan vermeld het filetype gewijzigd, waardoor de files weer leesbaar worden.

De bytes waarin de begintrack en -sector en de filenaam zelf staan, worden gebruikt in het programma LIST TRACK EN SECTOR om de sectoren te volgen die aan een file zijn toegewezen en vervolgens bij elke sector de juiste filenaam af te drukken. Deze bytes stellen het DOS in staat de directory te doorzoeken naar een bepaalde filenaam en het begin van die file te vinden.

In hoofdstuk 9 zagen we al dat relatieve files in feite bestaan uit twee aparte delen: één waarin zich de gegevens bevinden en een ander waarin wordt bijgehouden in welke sectoren van de diskette de gegevens staan. De tabel laat zien dat het beginadres van dit tweede deel vermeld staat in de bytes 19 en 20, terwijl de vastgestelde lengte van elke record in de relatieve file in byte 21 staat.

De bytes 26 en 27 zijn nieuw voor ons, maar hun functie is eenvoudig: Als een file wordt opgeslagen of geOPENd met de toevoeging '@0:' om aan te geven dat een eventueel eerder opgeslagen file met dezelfde naam moet worden overschreven, worden in deze twee bytes begintrack en -sector opgeslagen, totdat de nieuwe file is gecreëerd.

Tenslotte wordt bij het LISTen van de directory op het scherm achter elke naam getoond hoeveel sectoren deze omvat, en dat getal is opgeslagen in de bytes 28 en 29 van de filevermelding.

In totaal neemt elke vermelding in de directory 30 bytes in beslag (0-29). Om de acht mogelijke vermeldingen netjes te verdelen over de 256 bytes van de sector, worden aan de eerste zeven vermeldingen steeds twee

3. Zet nu de andere diskdrive(s) weer aan.
Denk erom dat, wanneer de diskdrive om de een of andere reden wordt uitgezet, deze procedure moet worden herhaald, omdat de drive bij het aanzetten automatisch weer zijn oude nummer krijgt.

14 Appendices

APPENDIX A Foutmeldingen

- | GETAL FOUTMELDING | |
|-------------------|--|
| 0 | Geen fout. |
| 1 | Commando SCRATCH is uitgevoerd. Het eerste getal na de melding bevat het aantal gewiste files. |
| 2-19 | Hebben geen betekenis op de 1541. |
| 20 | De header van de laatst opgegeven sector wordt niet gevonden. |
| 21 | De diskdrive kan het speciale merkteken niet vinden dat op elke track wordt gezet.i.v.m. de timing. Als dit met meerdere diskettes gebeurt, moet de diskdrive worden nagekeken. |
| 22 | De diskdrive moet een sector lezen die hij niet kan vinden. |
| 23 | De checksum (controle-som), een getal dat bij elke sector wordt opgeslagen om de juistheid van de gegevens te controleren, geeft aan dat de data onjuist zijn teruggelezen. |
| 24 | Meer algemene melding, die inhoudt dat gegevens vermindert worden teruggelezen. |
| 25 | De gegevens zijn niet correct naar de diskette geschreven. |
| 26 | Poging om te schrijven naar een diskette die beschermd is tegen schrijven. Meestal is de write-protect inkeping afgeplakt. |
| 27 | De header van een sector klopt niet met de checksum. |
| 28 | De diskdrive kan tijdens het schrijven het volgende blok niet detecteren. De diskette moet meestal opnieuw worden geformateerd. |
| 29 | Het ID (identificatienummer) van de track die wordt gelezen komt niet overeen met het ID van de diskette. Kan het gevolg zijn van het verwisselen van de diskette. Initialiseren helpt in dat geval. |
| 30 | Het laatst verzonden commando werd niet begrepen, waarschijnlijk ten gevolge van een onjuiste formulering. |
| 31 | Het laatst verzonden commando werd niet begrepen, waarschijnlijk ten gevolge van een onjuist codewoord. |
| 32 | Het laatste commando was te lang. |

33 Een ongeldige filenaam is gebruikt.
34 De drive kan geen filenaam in de instructie ontdekken. Ontstaat vaak door het weglaten van een dubbel punt achter de '0', waarmee het drive-nummer wordt aangegeven.

39 Het laatste commando werd niet begrepen.
50 Er wordt gevraagd om gegevens te lezen voorbij het einde van de file.

51 Gegevens die naar een relatieve file worden geschreven passen niet binnen de lengte van een record.
52 Een positie binnen een relatieve file wordt zodanig opgegeven, dat de file de capaciteit van de diskette zou overschrijden.
60 De file die wordt geOPENd voor tezen is eerder gebruikt en is niet correct gesloten.

61 Er wordt toegang gevraagd tot een file die niet is geOPENd.
62 De betreffende file staat niet op de diskette.

63 De opgegeven filenaam komt al voor op de diskette.
64 Er wordt een opdracht gegeven die niet overeenstemt met het filetype.

65 De sector die wordt opgegeven in een BLOCK-ALLOCATE-commando is al bezet. De getallen voor track en sector geven de eerstvolgende (hogere) vrije track en sector aan. Twee nullen geven aan dat er geen vrije sector meer is.
66 De laatst opgegeven track en sector bestaan niet. Kan een programmeertout zijn, of de wijzers naar de volgende track en sector zijn vermist.

67 Geeft een illegale track of sector aan.
70 Het opgegeven kanaal naar de diskdrive is niet beschikbaar, of er zijn helemaal geen kanalen beschikbaar.

71 De Block Allocation Map klopt niet met hetgeen er op de diskette staat. De diskette moet worden geinitialiseerd, hoewel er al schade aangericht kan zijn.
72 Er zijn al te veel meldingen in de directory, of er is geen ruimte meer op de diskette.
73 De diskette is geformatteerd met een ander DOS.
74 Er is geen diskette aanwezig in de diskdrive.

U5 (UE) spring naar \$0506
U6 (UF) spring naar \$0509
U7 (UG) spring naar \$050C
U8 (UH) spring naar \$050F
U9 (UI) spring naar vector op \$FFFA
U: (UJ) opstart-vector

U1+ stel diskdrive in op Commodore 64-snelheid
U1- stel diskdrive in op VIC 20-snelheid
Zoals u ziet, staan de adressen van de eerste acht sprong-commando's drie bytes uit elkaar. Zodoende kan de gebruiker vanaf \$500 makkelijk een sprongtabel creëren.

APPENDIX C Commando's van de DOS-wedge

Recente 1541's worden geleverd met een handig programma dat 'DOS-WEDGE' of 'DOS Support' wordt genoemd en waarmee de organisatorische commando's makkelijker in direct mode (zonder regelnummer, rechtstreeks op het toetsenbord) kunnen worden ingetoest. Het programma staat op de demo-diskette, samen met enkele andere gebruikersprogramma's. De commando's die de 'WEDGE' toegankelijk maken:

1. @ <commando-string> of > <commando-string>
2. @ ag>

3. / <filenaam>
4. % <filenaam>
5. ↑ <filenaam>
6. ← <filenaam>

1. De commando-string kan elk geldig commando zijn, gericht aan het foutkanaal, dat automatisch wordt geOPENd door de WEDGE. Het intoeitsen van '\$' als commando zorgt ervoor dat de directory op het scherm wordt afgedrukt zonder dat een programma in het geheugen wordt gewist. Het LISTen van de directory kan worden onderbroken door de spatiebalk in te drukken. Met een andere toets kunt u het weer voortzetten. RUN/STOP stopt het LISTen.
2. Dit commando leest de foutmelding. Het OPENen, lezen en weer sluiten van het foutkanaal is overbodig. Overigens kan in alle gevallen genoemd onder punt 1) en 2) in plaats van '@' ook het teken '>' worden gebruikt.
3. Laadt een file zonder dat LOAD hoeft te worden ingetoest. Ook aanhalingstekens voor en achter de filenaam zijn overbodig. De directory kan worden geladen door '/\$' in te toetsen.

APPENDIX B Meer commando's in machinetaal

Naast de reeds in hoofdstuk 12 behandelde commando's zijn er nog de volgende 'U'-commando's:
U3 (UC) spring naar \$0500.
U4 (UD) spring naar \$0503.